



أربيان أوياسس تريدينغ ذ.م.م
Arabian Oasis Trading W.L.L

Let us move together to achieve our goal.



PO BOX : 1004

Doha - Qatar



Phone : + 974 4418 0485



E-Mail : sales @arabianoasis.org

Web : www.arabianoasis.org

Index

About Us	3
GI Scaffolding and accessories	4
Aluminium Ladders	6
Fiber Ladders	14
Aluminium Rolling Ladders	19
Aluminium Scaffolding	20
3M Personal safety	30
Force Professional Tools	31
Industrial Cleaning Wire Brushes	32
Fosse Liquitrol Spill Pallet & Spill Kit	33
Lifmex Movers	34
Fire Retardant Tarpaulin	35

About Us,

AOT office is located in Souqe Al Nayeef,

Opp BMW industrial Mail Street, Doha- Qatar.

Over the past two decades, AOT has accumulated a strong and healthy market trust through a simple principle that we follow.

EARN TRUCT WITH BUSINESS...

AOT is among been providing the leading supplier of GI Scaffolding, Aluminium Scaffolding & Industrial products in the Gulf for almost two decades.

AOT has been providing support and service to all major industries, contractors and traders in the region



Contact Us,



PO BOX : 1004

Doha - Qatar



Phone : + 974 4417 0485



E-Mail : sales @arabianoasis.org

Web : www.arabianoasis.org



SCAFFOLD TUBES, CUPLOCK STANDARD, COUPLOCK LEDGER, BOARDS, COUPLER, LADER BEAM & ACCESS CRADLE



Scaffold Tubes



Ladder-Beam



Scaffold Boards



Swivel Coupler Drop Forged



Girder Coupler



Board Retaining Coupler



Putlog (Single)
Coupler Drop Forged



Pipe Sleeve Coupler
Drop Forged



Double Coupler Drop Forged



Joint Pin



Base Plate



Ladder Coupler



Aluminum Straight Ladder



Cuplock Standard



Cuplock Ledger



Scaff Tag



Spirit Level



Scaffolding Spanner Ratchet



Scaffolding Spanner Box



Scaffolding Spanner




Unite Beam

TWO WAY ALUMINIUM LADDER


FEATURES

- Enables access from both sides
- Anti-slip shoes
- Light weight domestic and industrial usage
- Riveted hinge connections
- Tool's resting area provided at the top

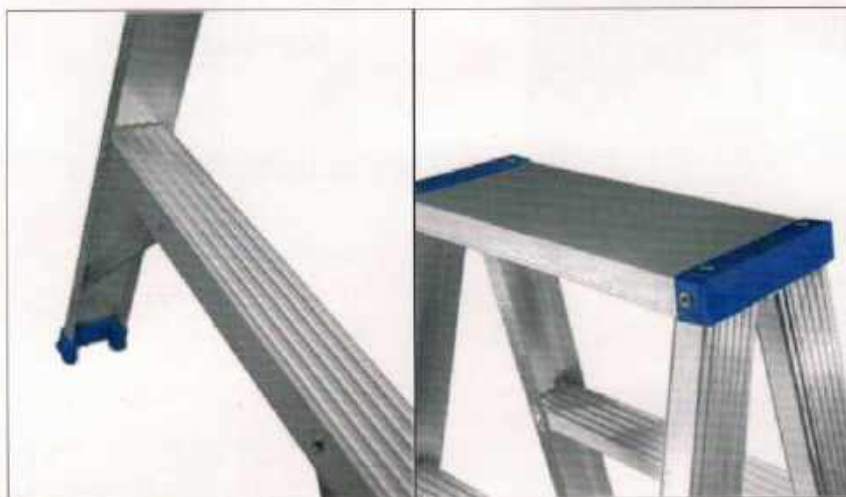

 **أريان اوياسس تریدینگ ذ.م.م**
Arabian Oasis Trading W.L.L.

ITEM CODE : TWAL TECHNICAL DATA (DIMENSIONS IN MM)

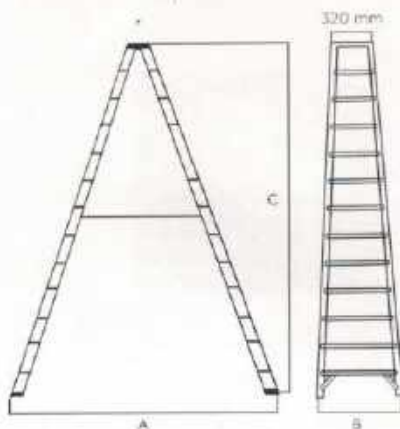

SAFE WORKING LOAD 110 KGS						
CODE	NO OF STEPS	LENGTH	A	B	C	Weight Kg
TWAL4	4	1000	530	440	972	2.70
TWAL5	5	1252	662	472	1215	3.30
TWAL6	6	1505	795	504	1470	4.00
TWAL7	7	1782	928	536	1706	4.80
TWAL8	8	2015	1060	568	1962	5.40
TWAL9	9	2270	1192	600	2200	6.30
TWAL10	10	2520	1325	632	2460	7.10
TWAL12	12	3025	1590	696	2955	8.90
TWAL14	14	3530	1855	760	3440	11.00
TWAL16	16	4040	2120	824	3920	13.00

HEAVY DUTY TWO WAY ALUMINIUM LADDER

ITEM CODE : HDTWAL


TECHNICAL DATA (DIMENSIONS IN MM)

SAFE WORKING LOAD 150 KGS						
CODE	NO OF STEPS	LENGTH	A	B	C	Weight Kg
HDTWAL4	4	1170	830	440	1130	5.6
HDTWAL5	5	1470	990	470	1415	6.6
HDTWAL6	6	1770	1155	500	1700	8.4
HDTWAL7	7	2070	1310	530	2000	9.9
HDTWAL8	8	2370	1465	560	2280	11.5
HDTWAL10	10	2970	1800	620	2890	14.5
HDTWAL12	12	3570	1855	680	3445	16.9
HDTWAL14	14	4170	2435	740	4020	20.2
HDTWAL16	16	4770	2760	800	4595	23.6
HDTWAL17	17	5070	2955	830	4885	27.1



FEATURES


- Twin ladder designed for the use of one or two persons
- Slip – Resistant feet
- Heavy gauge steel hinges
- Double-Rivet step construction
- 1-2 Person can use from both sides

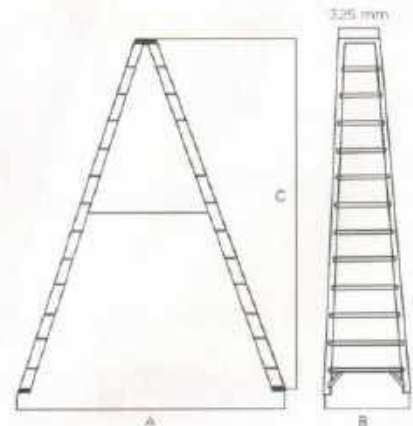

DUAL PURPOSE ALUMINIUM LADDER

FEATURES

- 2 in 1 ladder converting double sided Ladder and straight ladder
- Slip resistant foot
- Strong hinges and latch provides Locking in double side mode
- Ideal for all type of job in industries And construction sites
- Tool resting area provided at the top

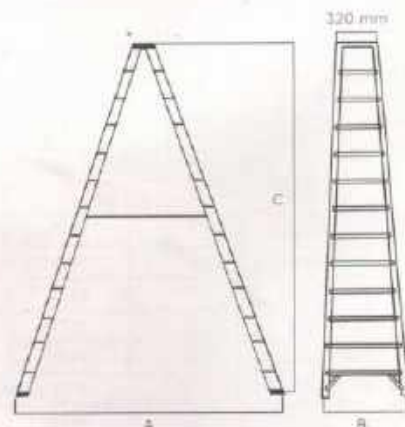

ITEM CODE : DPAL TECHNICAL DATA (DIMENSIONS IN MM)

SAFE WORKING LOAD 130 KGS						
CODE	NO OF STEPS	LENGTH	A	B	C	Weight Kg
DPAL4	4	1200	745	427	1075	4.05
DPAL5	5	1500	950	463	1345	5.7
DPAL6	6	1800	1130	500	1630	6.7
DPAL7	7	2100	1325	538	1915	8.1
DPAL8	8	2400	1520	578	2205	9.3
DPAL9	9	2700	1710	615	2490	10.7
DPAL10	10	3000	1880	650	2775	12.2
DPAL12	12	3600	2240	730	3350	15.5



PLATFORM ALUMINIUM LADDER

FEATURES



- Platform provides secure and comfortable Work area
- Easy to handle and fold
- Safety guardrail
- Single person use, access from front side
- Slip resistant foot and platform



ITEM CODE : PFAL
TECHNICAL DATA (DIMENSIONS IN MM)

SAFE WORKING LOAD 100 KGS

CODE	NO OF STEPS	LENGTH	A	B	C	PF H	Weight Kg
PFAL4	3+1	1440	1300	430	730	785	3.4
PFAL5	4+1	1640	1495	455	850	980	3.9
PFAL6	5+1	1840	1690	480	970	1175	4.45
PFAL7	6+1	2040	1885	505	1090	1370	5.05
PFAL8	7+1	2240	2080	530	1220	1565	5.7
PFAL9	8+1	2440	2275	555	1310	1760	6.4

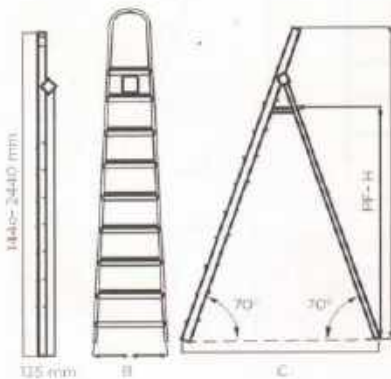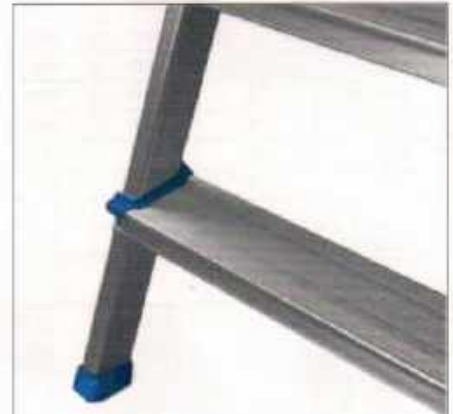

STRAIGHT ALUMINIUM LADDER

FEATURES



- Square shaped rugs gives more strength to the ladder
- Side rectangular section designed for more sturdy ladder
- Rung crimped into style gives more strength
- Anti-slip shoes

ITEM CODE : STAL

TECHNICAL DATA (DIMENSIONS IN MM)

SAFE WORKING LOAD 150 KGS					
CODE	NO OF STEPS	LENGTH	A	B	Weight Kg
STAL5	5	1800	1740	400	3.5
STAL6	6	2100	2030	400	4.05
STAL7	7	2400	2320	400	4.6
STAL8	8	2700	2610	400	5.15
STAL9	9	3000	2900	400	5.7
STAL10	10	3300	3190	400	6.25
STAL11	11	3600	3480	400	6.8
STAL12	12	3900	3770	400	7.35
STAL13	13	4200	4060	400	7.9
STAL14	14	4500	4350	400	8.45
STAL15	15	4800	4640	400	9
STAL16	16	5100	4930	400	9.55
STAL17	17	5400	5220	400	10.1
STAL18	18	5700	5510	400	10.65
STAL19	19	6000	5800	400	11.2

optional Hook

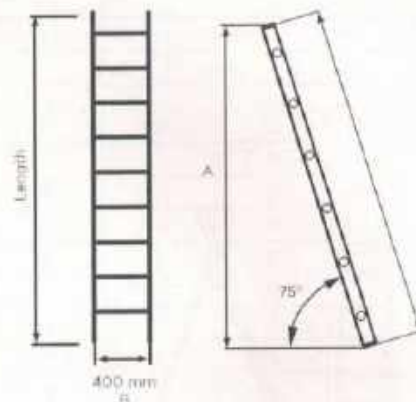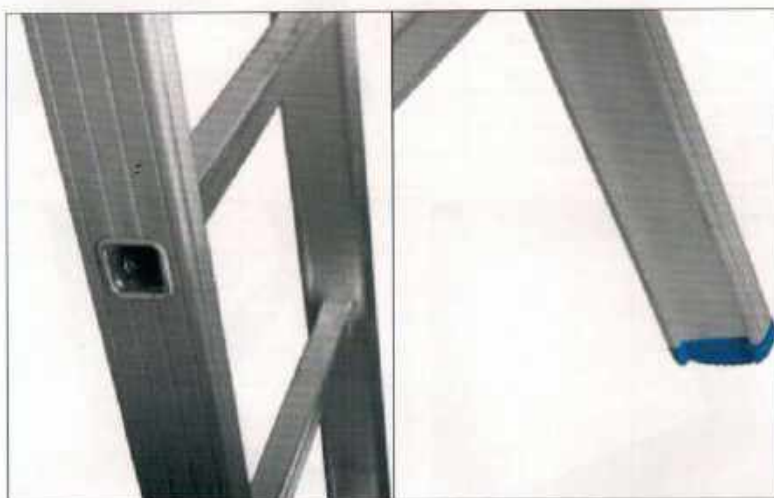




DOUBLE SECTION STRAIGHT ALUMINIUM LADDER

FEATURES

- Large and comfortable square shaped rugs
- Extendable type ladder
- Non-slip feet and rugs
- Anti-slip foot
- Rigid aluminium locking hook moves
Comfortable in rope and pulley

ITEM CODE : DSSTAL TECHNICAL DATA (DIMENSIONS IN MM)

SAFE WORKING LOAD 150 KGS					
CODE	NO OF STEPS	LENGTH	A	B	Weight Kg
DSSTAL5	5+5	3000	2800	400	8
DSSTAL6	6+6	3600	3480	400	9.1
DSSTAL7	7+7	4200	4060	400	10.3
DSSTAL8	8+8	4800	4640	400	11.45
DSSTAL9	9+9	5400	5220	400	12.6
DSSTAL10	10+10	6000	5800	400	13.75
DSSTAL11	11+11	6600	6380	400	14.9
DSSTAL12	12+12	7200	6960	400	16
DSSTAL13	13+13	7800	7540	400	17.1
DSSTAL14	14+14	8400	8120	400	18.25
DSSTAL15	15+15	9000	8700	400	19.35
DSSTAL16	16+16	9600	9280	400	20.5
DSSTAL17	17+17	10200	9860	400	21.65
DSSTAL18	18+18	10800	10440	400	22.8
DSSTAL19	19+19	11400	11020	400	23.85

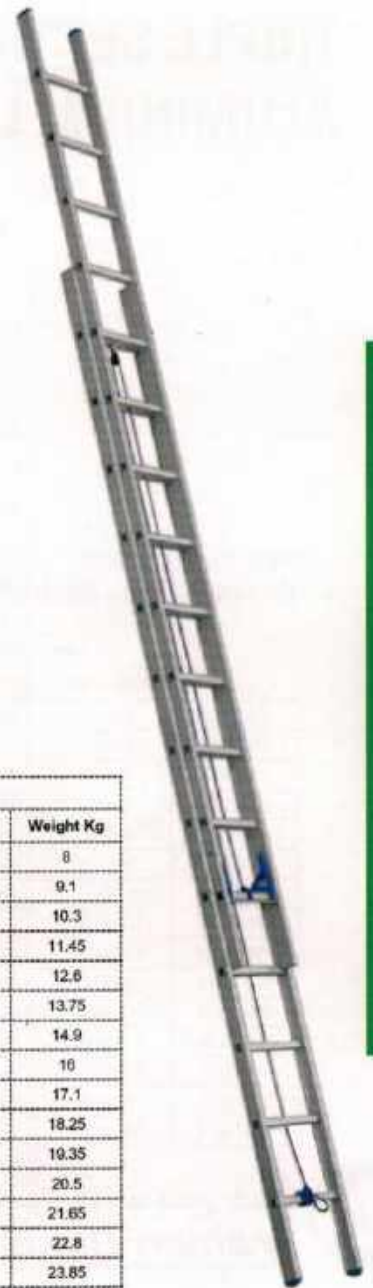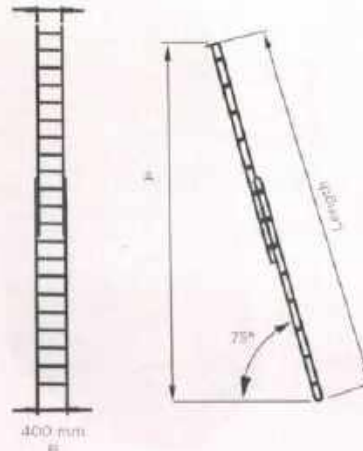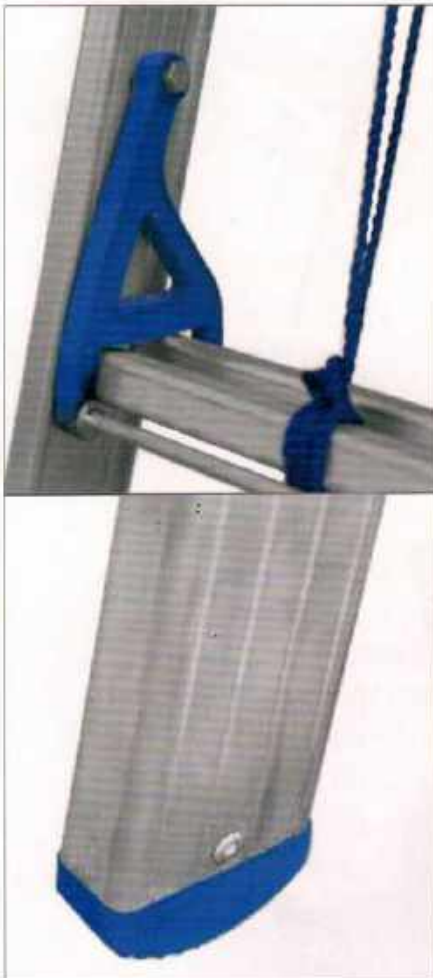

TRIPLE SECTION STRAIGHT ALUMINIUM LADDER



FEATURES

- Large and comfortable square shaped rugs
- Anti-slip foot
- Extendable type ladder
- Light weight ladder enable easy carry
- Suitable for single person usage
- Rigid aluminium locking hook moves comfortably in rope and pulley

ITEM CODE : TSSTAL

TECHNICAL DATA (DIMENSIONS IN MM)

SAFE WORKING LOAD 160 KGS					
CODE	NO OF STEPS	LENGTH	A	B	Weight Kg
TSSTAL5	5+5+5	4200	4060	400	12.5
TSSTAL6	6+6+6	5100	4930	400	14.15
TSSTAL7	7+7+7	6000	5800	400	16
TSSTAL8	8+8+8	6900	6670	400	17.75
TSSTAL9	9+9+9	7800	7540	400	20.65
TSSTAL10	10+10+10	8700	8410	400	21.25
TSSTAL11	11+11+11	9600	9280	400	23
TSSTAL12	12+12+12	10500	10150	400	24.65
TSSTAL13	13+13+13	11400	11020	400	26.3
TSSTAL14	14+14+14	12300	11890	400	28.15
TSSTAL15	15+15+15	13200	12760	400	29.7
TSSTAL16	16+16+16	14100	13630	400	31.45
TSSTAL17	17+17+17	15000	14500	400	33.2
TSSTAL18	18+18+18	15900	15370	400	34.95
TSSTAL19	19+19+19	16800	16240	400	36.5

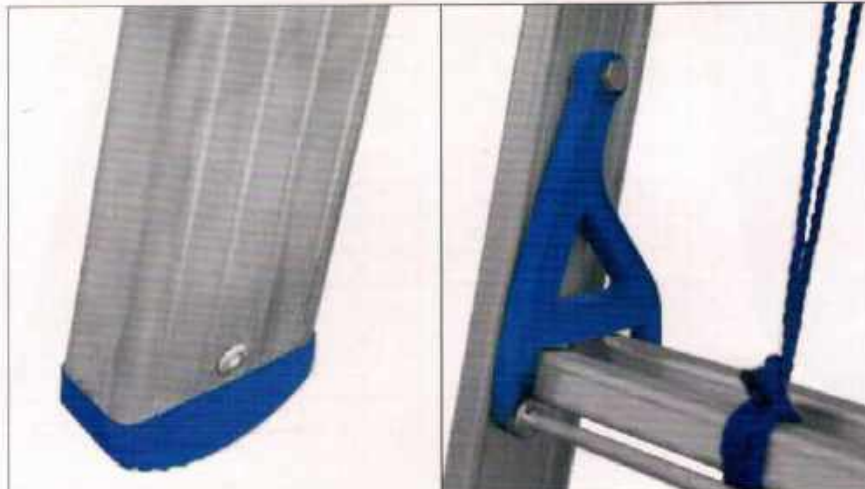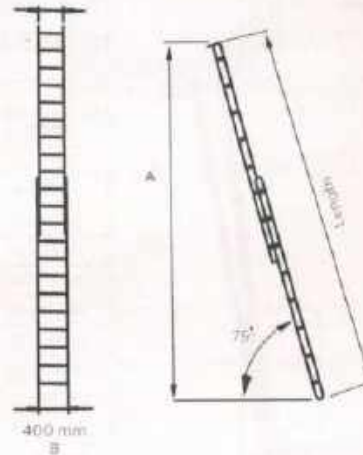

MULTI TASK ALUMINIUM LADDER



FEATURES

- Come fully assembled
- Designed for one or two persons jobs
- Shippable by ground parcel services
- Slip resistant multi directional rungs
- Slip resistant feet
- Different shapes suites for various applications

ITEM CODE : MTAL TECHNICAL DATA (DIMENSIONS IN MM)

SAFE WORKING LOAD 150 KGS							
CODE	NO OF STEPS	STRAIGHT	A TYPE	PLATFORM	STEP	WIDTH	WEIGHT KG
		HEIGHT	HEIGHT	HEIGHT	DISTANCE		
MTAL8	4 X 2	2750	130	760	290	380	11.5
MTAL12	4 X 3	3700	1800	1010	290	380	13
MTAL16	4 X 4	4750	2300	1260	280	380	14.5
MTAL20	4 X 5	5800	2800	1540	280	380	16.2
MTAL24	4 X 6	7000	3360	1850	280	380	17.7
MTAL28	4 X 7	8100	3880	2080	280	380	20.2
MTAL32	4 X 8	920	4400	2310	280	380	22.2



FIBER GLASS (FRP) STRAIGHT LADDER


FEATURES

- Crimped, heavy duty extruded rung with double locks provides more strength
- Ideal for utility and telecommunication industries
- Shoes with wider slip resistant pad
- Square rung steps offer greater grip for climbing
- Antistatic and fire retardant style


ITEM CODE : FRPSL

TECHNICAL DATA (DIMENSIONS IN MM)

SAFE WORKING LOAD 110 KGS				
CODE	NO OF STEPS	LENGTH	A	B
FRPSL7	7	2000	1930	400
FRPSL10	10	3000	2900	400
FRPSL13	13	4000	3865	400
FRPSL17	17	5000	4830	400
FRPSL21	21	6000	5800	400

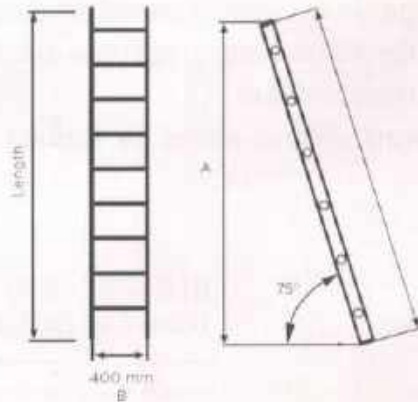

أربيان أوباسس تریڈینگ ذ.م.م
Arabian Oasis Trading W.L.L

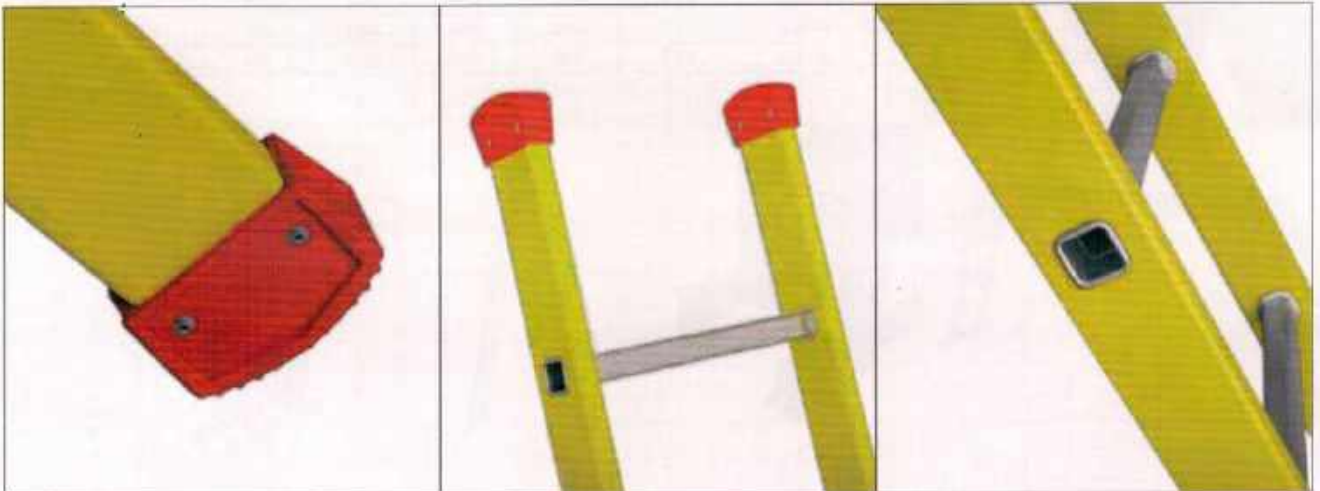

FIBER GLASS (FRP) DOUBLE SECTION STRAIGHT LADDER


FEATURES

- Wide & comfortable square shaped rungs
- Crimped, heavy duty extruded rung with double locks
Provided more strength
- Ideal for utility and telecommunication industry
- Wider shoes with anti-slip resistant pad
- Rectangle box type side style gives more strength to the ladder
- Antistatic and fire retardant side style

ITEM CODE : FRPDSL

TECHNICAL DATA (DIMENSIONS IN MM)

SAFE WORKING LOAD 150 KGS					
CODE	NO OF STEPS	LENGTH	A	B	FOLDED HEIGHT
FRPDSL7	7+7	3440	3330	400	2000
FRPDSL10	10+10	5440	5250	400	3000
FRPDSL13	13+13	7440	7180	400	4000
FRPDSL17	17+17	9440	9120	400	5000
FRPDSL21	21+21	11440	11140	400	6000

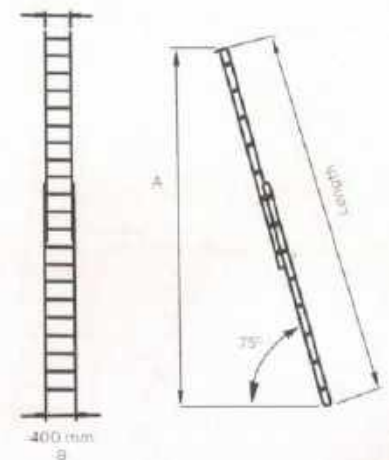



FIBER GLASS (FRP) SINGLE SIDED LADDER


FEATURES

- Sturdy paint can hanger on back side of top
- Slip resistant steps
- Slip resistant foot pads attached to the style
- Single person use from front access
- East access enables due to wide steps
- Anti-static and fire retardant style
- Cross support bracing gives more strength to the steps

أريبيان أوياسس تریدینگ ذ.م.م
Arabian Oasis Trading W.L.L

ITEM CODE : FRPSS
TECHNICAL DATA (DIMENSIONS IN MM)

SAFE WORKING LOAD 130 KGS					
CODE	NO OF STEPS	LENGTH	A	B	Weight Kg
FRPSS4	4	1225	790	480	5.3
FRPSS5	5	1525	945	490	6.6
FRPSS6	6	1825	1100	520	7.9
FRPSS7	7	2125	1255	550	9.2
FRPSS8	8	2425	1410	580	10.3
FRPSS10	10	3025	1720	640	13
FRPSS12	12	3625	2030	700	15.9

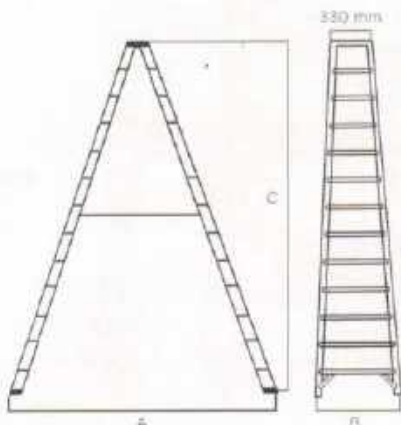

FIBER GLASS (FRP) DOUBLE SIDED LADDER



FEATURES

- Heavy gauge steel hinges
- Designed for 1 or 2 persons job
- Large aluminium extruded top with thick side plate
- Anti-slip foot with slip resistant pad
- Anti-static and fire retardant profile
- Cross support bracing gives more strength to the steps



ITEM CODE : FRPDS TECHNICAL DATA (DIMENSIONS IN MM)

SAFE WORKING LOAD 150 KGS					
CODE	NO OF STEPS	LENGTH	A	B	Weight Kg
FRPDS4	4	1200	840	450	7.1
FRPDS5	5	1500	1000	480	8.5
FRPDS6	6	1800	1165	510	9.9
FRPDS7	7	2100	1320	540	11.8
FRPDS8	8	2400	1500	570	13.6
FRPDS10	10	3000	1810	630	17.4
FRPDS12	12	3600	2150	690	21.3
FRPDS14	14	4200	2445	750	26
FRPDS16	16	4800	2770	810	31

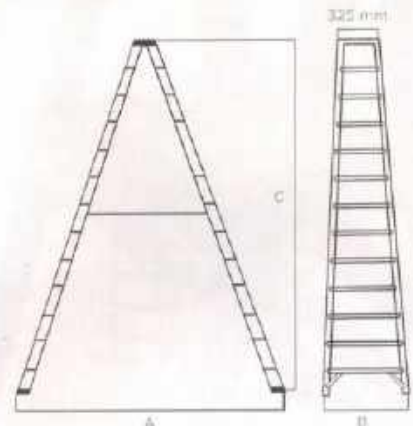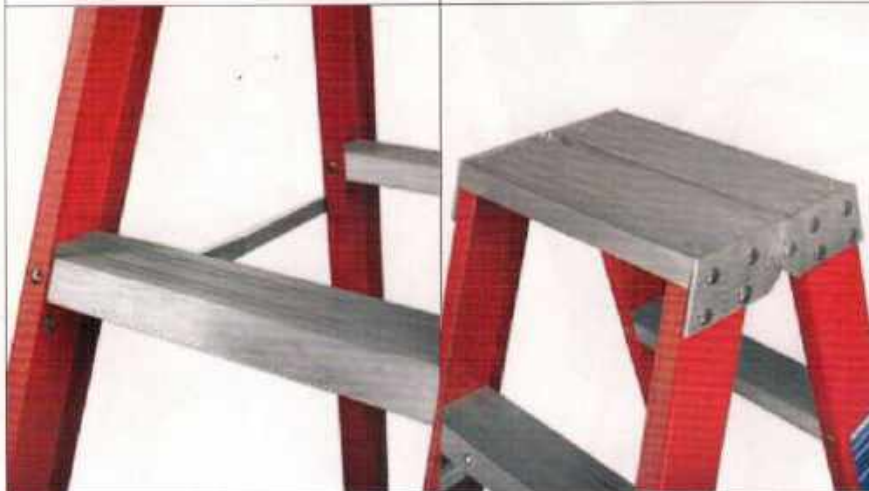


FIBER GLASS PLATFORM LADDER

FEATURES

- Pro top with multiple tool tray
- Rigid slip resistant boot
- Heavy duty –rivet step construction
- Single person use access from front side
- Foldable type
- Cross bracing gives added strength to the step
- Anti-static and fire retardant profile

ITEM CODE : FRPPFL TECHNICAL DATA (DIMENSIONS IN MM)

SAFE WORKING LOAD 130 KGS						
CODE	NO OF STEPS	LENGTH	A	B	C	PFH
FRPPFL4	3+1	2000	1015	595	1880	1140
FRPPFL5	4+1	2300	1185	625	2165	1425
FRPPFL6	5+1	2600	1355	655	2450	1710
FRPPFL7	6+1	2900	1525	685	2735	2010
FRPPFL8	7+1	3200	1695	715	3020	2290
FRPPFL10	9+1	3800	2035	775	3590	2900

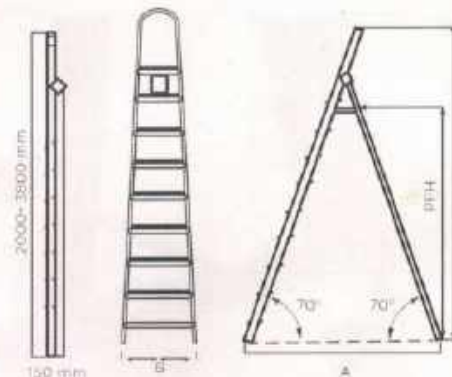

ALUMINIUM ROLLING WAREHOUSE LADDER



FEATURES

- Fixed and fully welded
- Wide and Anti-skid step
- Wide working platform with Safety Guardrail
- Movable with lockable caster wheels

ITEM CODE : RWAL

TECHNICAL DATA (DIMENSIONS IN MM)

SAFE WORKING LOAD 150 KGS							
CODE	NO OF STEPS	LENGTH	A	B	C	PF H	Weight KG
RWAL4	3+1	2000	1165	900	1730	940	16.4
RWAL6	5+1	2500	1520	900	2200	1410	19.1
RWAL8	7+1	3000	1875	1000	2670	1880	22
RWAL10	9+1	3500	2230	1100	3140	2350	25
RWAL12	11+1	4000	2585	1200	3610	2820	28.6

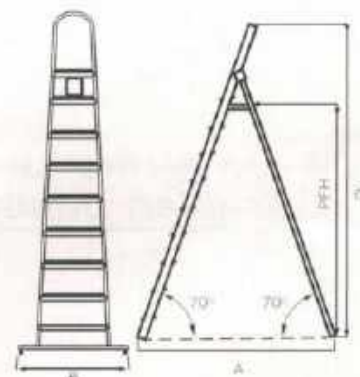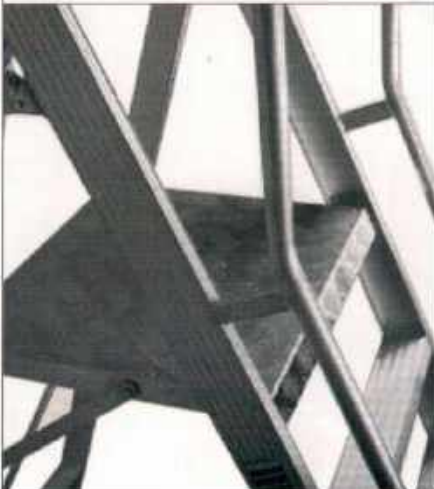

ALUMINIUM PODIUM SCAFFOLDING

FEATURES

- Mini steps provide easy access
- Ample space provided for single person usage wide platform
- Guardrail provided with lockable doors
- Movable type, Suitable for less working areas





ITEM CODE : AMPS
TECHNICAL DATA (DIMENSIONS IN MM)

SAFE WORKING LOAD 200 KGS								
CODE	WIDTH	DEPTH	HEIGHT	PF-HEIGHT	STEPS	PLATFORM	D.BRACE	6" CASTERS
AMPS 2	800	1000	2000	1000	2	1	2	4
AMPS 2.5	800	1200	2500	1500	3	1	2	4
AMPS 3	800	1500	3000	2000	5	1	2	4

ALUMINIUM FOLDING SCAFFOLDING

FEATURES

- Folding Mechanism enables easy transport & storage facility
- Single person can assemble and dismantle the unit comfortably
- Caster wheels are provided with Dual breaking system
- Fully welded with folding Mechanism



 **أريبيان أوياسس تریدینگ ذ.م.م.**
Arabian Oasis Trading W.L.L.





ITEM CODE : AMFS

TECHNICAL DATA (DIMENSIONS IN MM)

SAFE WORKING LOAD PER PLATFORM 225 KGS									
CODE	WIDTH	DEPTH	HEIGHT	PF-HEIGHT	PLATFORM	H.BRACE	D.BRACE	6" CASTERS	SPAN FRAME
AMFS2	800	1800	2000	1000	1	3	0	4	0
AMFS3	800	1800	3000	2000	1	5	2	4	1 MTR X 2
AMFS4	800	1800	4000	3000	1	5	5	4	2 MTR X 2

[illegible]



ITEM CODE : AMWS


Load rating	: 225 kg per platform
Safe working load	: 750 kg per tower
Base width	: 1.4 Meter
Base length	: 2.5 Meter



FEATURES

- Twin platform enables more spacious work area
- Built in ladder allows easy access to the top
- Safe working load per platform is 225 kg
- The caster has dual breaking system and the body is chrome plated
- Multi – level work is possible at one time
- As per the safety standards maximum height for this type of scaffolds 16 mtr
- Stabilizers are advisable for 5 mtr and above
- Aluminium scaffolds are otherwise known as
- Light weight scaffolding which enables easy assembling and dismantling

ALUMINIUM MOBILE STAIRWAY SCAFFOLDING

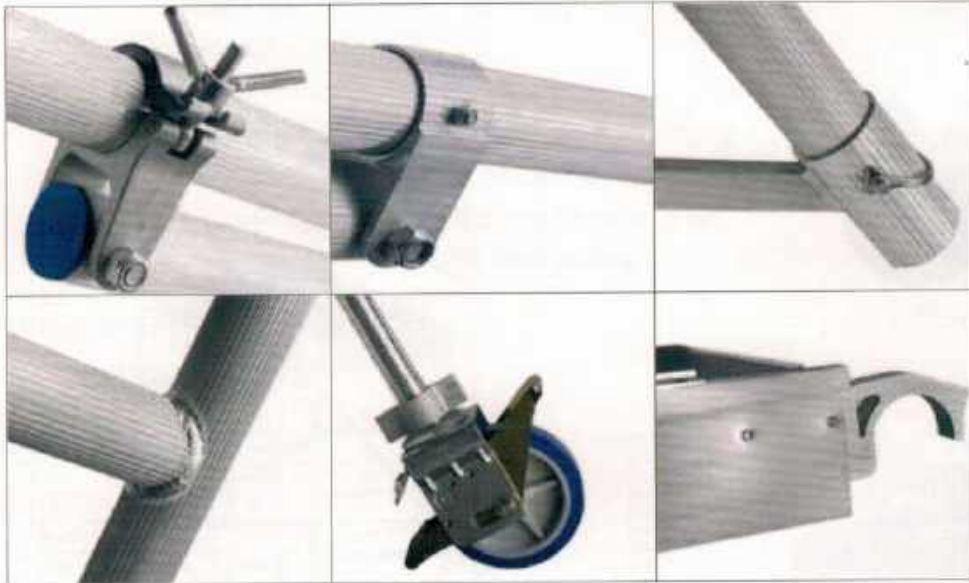

TECHNICAL DATA (DIMENSIONS IN MM)

ALUMINIUM STAIRWAY SCAFFOLDING 1.4 M WIDTH X 2 M LENGTH SAFE WORKING LOAD 225 KG PER PLATFORM							
SPECIFICATION							
TOWER CODE	AMSW4	AMWS 6	AMWS 8	AMWS 10	AMWS 12	AMWS 14	AMWS 16
TOWER HEIGHT	3.8 M	5.8 M	7.8 M	9.8 M	11.8 M	13.8 M	15.8 M
MAXIMUM PLATFORM HEIGHT	2.5 M	4.5 M	6.5 M	8.6 M	10.5 M	12.5 M	14.5 M
WORKING HEIGHT	4.5 M	6.5 M	8.5 M	10.5 M	12.5 M	14.5 M	16.5 M
ACCESSORIES							
WALKTHROUGH FRAME	1	1	1	1	1	1	1
SPAN FRAME	1	3	5	7	9	11	13
GUARD RAIL 1.5 M	2	2	2	2	2	2	2
STAIRCASE ONESIDE LANDING	1	2	3	4	5	6	7
HORIZONTAL BRACE	6	7	8	9	10	11	12
DIAGONAL BRACE	3	5	7	9	11	13	15
HANDTAIL	1	2	3	4	5	6	7
STABILIZER 3 M	0	4	0	0	0	0	0
STABILIZER 4.5 M	0	0	4	4	0	0	0
STABILIZER 6 M	0	0	0	0	4	4	4
CASTER WHEEL 8 WITH JACK	4	4	4	4	4	4	4
PLATFORM TRAPDOOR	2	2	2	2	2	2	2
PLATFORM FIX	0	1	2	3	4	5	6

Load rating : 225kg per platform
Safe working load : 750 kg per tower
Base width : 1.4 Meter
Base length : 2 Meter



FEATURES

- Safe landing with platform
- Safe working load of 225/ platform level up to the Maximum of 750 kgs per tower
- Easy walk from the base to the top level
- Provided staircase with anti slip step & handrail
- The platform provided with a large trap door for easy Access to working area
- Easy erection & dismantling
- Working on different level at the same time (every 2 mtr)

ALUMINIUM MOBILE NARROW SCAFFOLDING



FEATURES

- Single width scaffolding are used where the space has constraint
- Both built in ladder and 6 rung frames are provided depends on the customers Requirement
- Safe working load per platform is 225 kg
- The caster has dual breaking system and the body is chrome plated
- Multi-level work is possible at one time
- As per the safety standards maximum height for this type of scaffolds is 12 mtr
- Stabilizers are advisable for 5 mtr and above scaffolds
- Aluminium scaffolds are otherwise known as light weight scaffolding which enables easy assembling and dismantling

ITEM CODE : AMNS

LOAD RATING : 225 KG PER PLATFORM
TOTAL LOAD CAPACITY : 700 KG PER TOWER
BASE WIDTH : 0.80 METER
BASE LENGTH : 1.8 METER

TECHNICAL DATA (DIMENSIONS IN MM)

SAFE WORKING LOAD 225 KGS PER PLATFORM, 700 KG PER TOWER												
TOWER CODE		AMWS 2	AMWS 3	AMWS 4	AMWS 5	AMWS 6	AMWS 7	AMWS 8	AMWS 9	AMWS 10	AMWS 11	AMWS 12
TOWER HEIGHT		2 M	3 M	4 M	5 M	6 M	7 M	8 M	9 M	10 M	11 M	12 M
PLATFORM HEIGHT		1 M	2 M	3 M	4 M	5 M	6 M	7 M	8 M	9 M	10 M	11 M
WORKING HEIGHT		3 M	4 M	5 M	6 M	7 M	8 M	9 M	10 M	11 M	12 M	13 M
ACCESSORIES :												
SPAN FRAME	2 M	2	2	4	4	6	6	8	8	10	10	12
GUARD RAIL	1 M	0	2	0	2	0	2	0	2	0	2	0
1+BRACE	2 M	4	6	6	6	8	8	8	10	10	10	12
D-BRACE	2.2 M	2	2	6	8	10	12	14	16	18	20	22
STABILIZER	2 M	0	0	0	0	0	0	0	0	0	0	0
STABILIZER	3 M	0	0	0	4	4	4	0	0	0	0	0
STABILIZER	4.5 M	0	0	0	0	0	0	4	4	4	4	0
STABILIZER	6 M	0	0	0	0	0	0	0	0	0	0	4
CASTER WHEEL	6"	4	4	4	0	0	0	0	0	0	0	0
CASTER WHEEL	8"	0	0	0	4	4	4	4	4	4	4	4
PLATFORM TRAPDOOR		1	1	1	1	1	1	1	1	1	1	1
ACCESSORIES ADVISABLE FOR MORE SAFETY												
TOE BOARD		1	1	1	1	1	1	1	1	1	1	1
PLATFORM TRAPDOOR		0	0	0	1	1	2	2	3	3	3	4
STABILIZER	2 M	0	4	4	0	0	0	0	0	0	0	0



3M



أريان اوياسيس تردينج د.م.
Arabian Oasis Trading W.L.L.



3M Personal Safety



FORCE

PROFESSIONAL TOOLS



INDUSTRIAL CLEANING WIRE BRUSHES



Technical Brushes

Otto

A Complete Program
of fast moving Brushes



ASPILL KIT



Benefits



- Robust and Corrosion free

Applications

- Outside fuel and oil drum storage
- Comply with environmental legislation / best practice

Features

- Forkliftable
- Removable grating for easy cleaning
- Oil and chemical compatibility

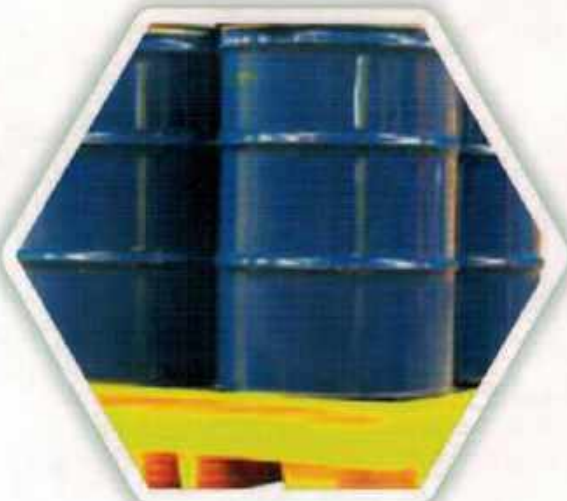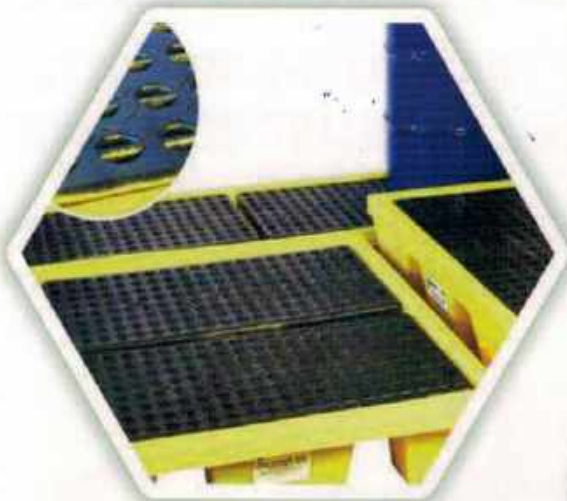

LIFMEX
MOVERS



أريبيان أوياسس تریدینگ ذ.م.م.
Arabian Oasis Trading W.L.L.

PROS FOR BATTERY OPERATED MATERIAL HANDLING EQUIPMENT



- Environmentally responsible option for high-performance machines
- Eliminate fuel costs for less expensive long-term operation
- No cord, no exhaust emissions, no gasoline smell
- Low maintenance and overall cost compared fuel combustion forklift
- Instant startup-just pull the trigger

- No need for oil and fuel mixing, only requires diluted water which cost less
- Less vibrations and quitter equipment performance
- No gradual drop in power-runs at fully speed until battery is depleted
- Long service life-more than 80% of battery capacity remains after 500 charges
- Battery design monitors temperature and shuts down if too warm or too cold

FIRE RETARDANT TARPAULIN



- Fire Retardant Tarpaulin that is coated with special chemical, which makes it fire resistant.
- Our Fire Retardant Tarpaulin is extensively used in commercial and industrial areas, where there is high risk of fire.
- We provide Fire Retardant Tarpaulins in different size and specifications.



أربيان أوياسس تریدینگ ذ.م.م
Arabian Oasis Trading W.L.L

Tel : 44180485, Fax : 44180139, P.B. No : 1004, E-mail : sales@arabianoasis.org, Web : www.arabianoasis.org



أربيان أوياسس تریدینگ ذ.م.م
Arabian Oasis Trading W.L.L



PO BOX : 1004

Doha - Qatar



Phone : + 974 4418 0485

E-Mail : sales @arabianoasis.org



Web : www.arabianoasis.org

